




**PRO**  
**FLOORZ**



**BEST  
SELLER**

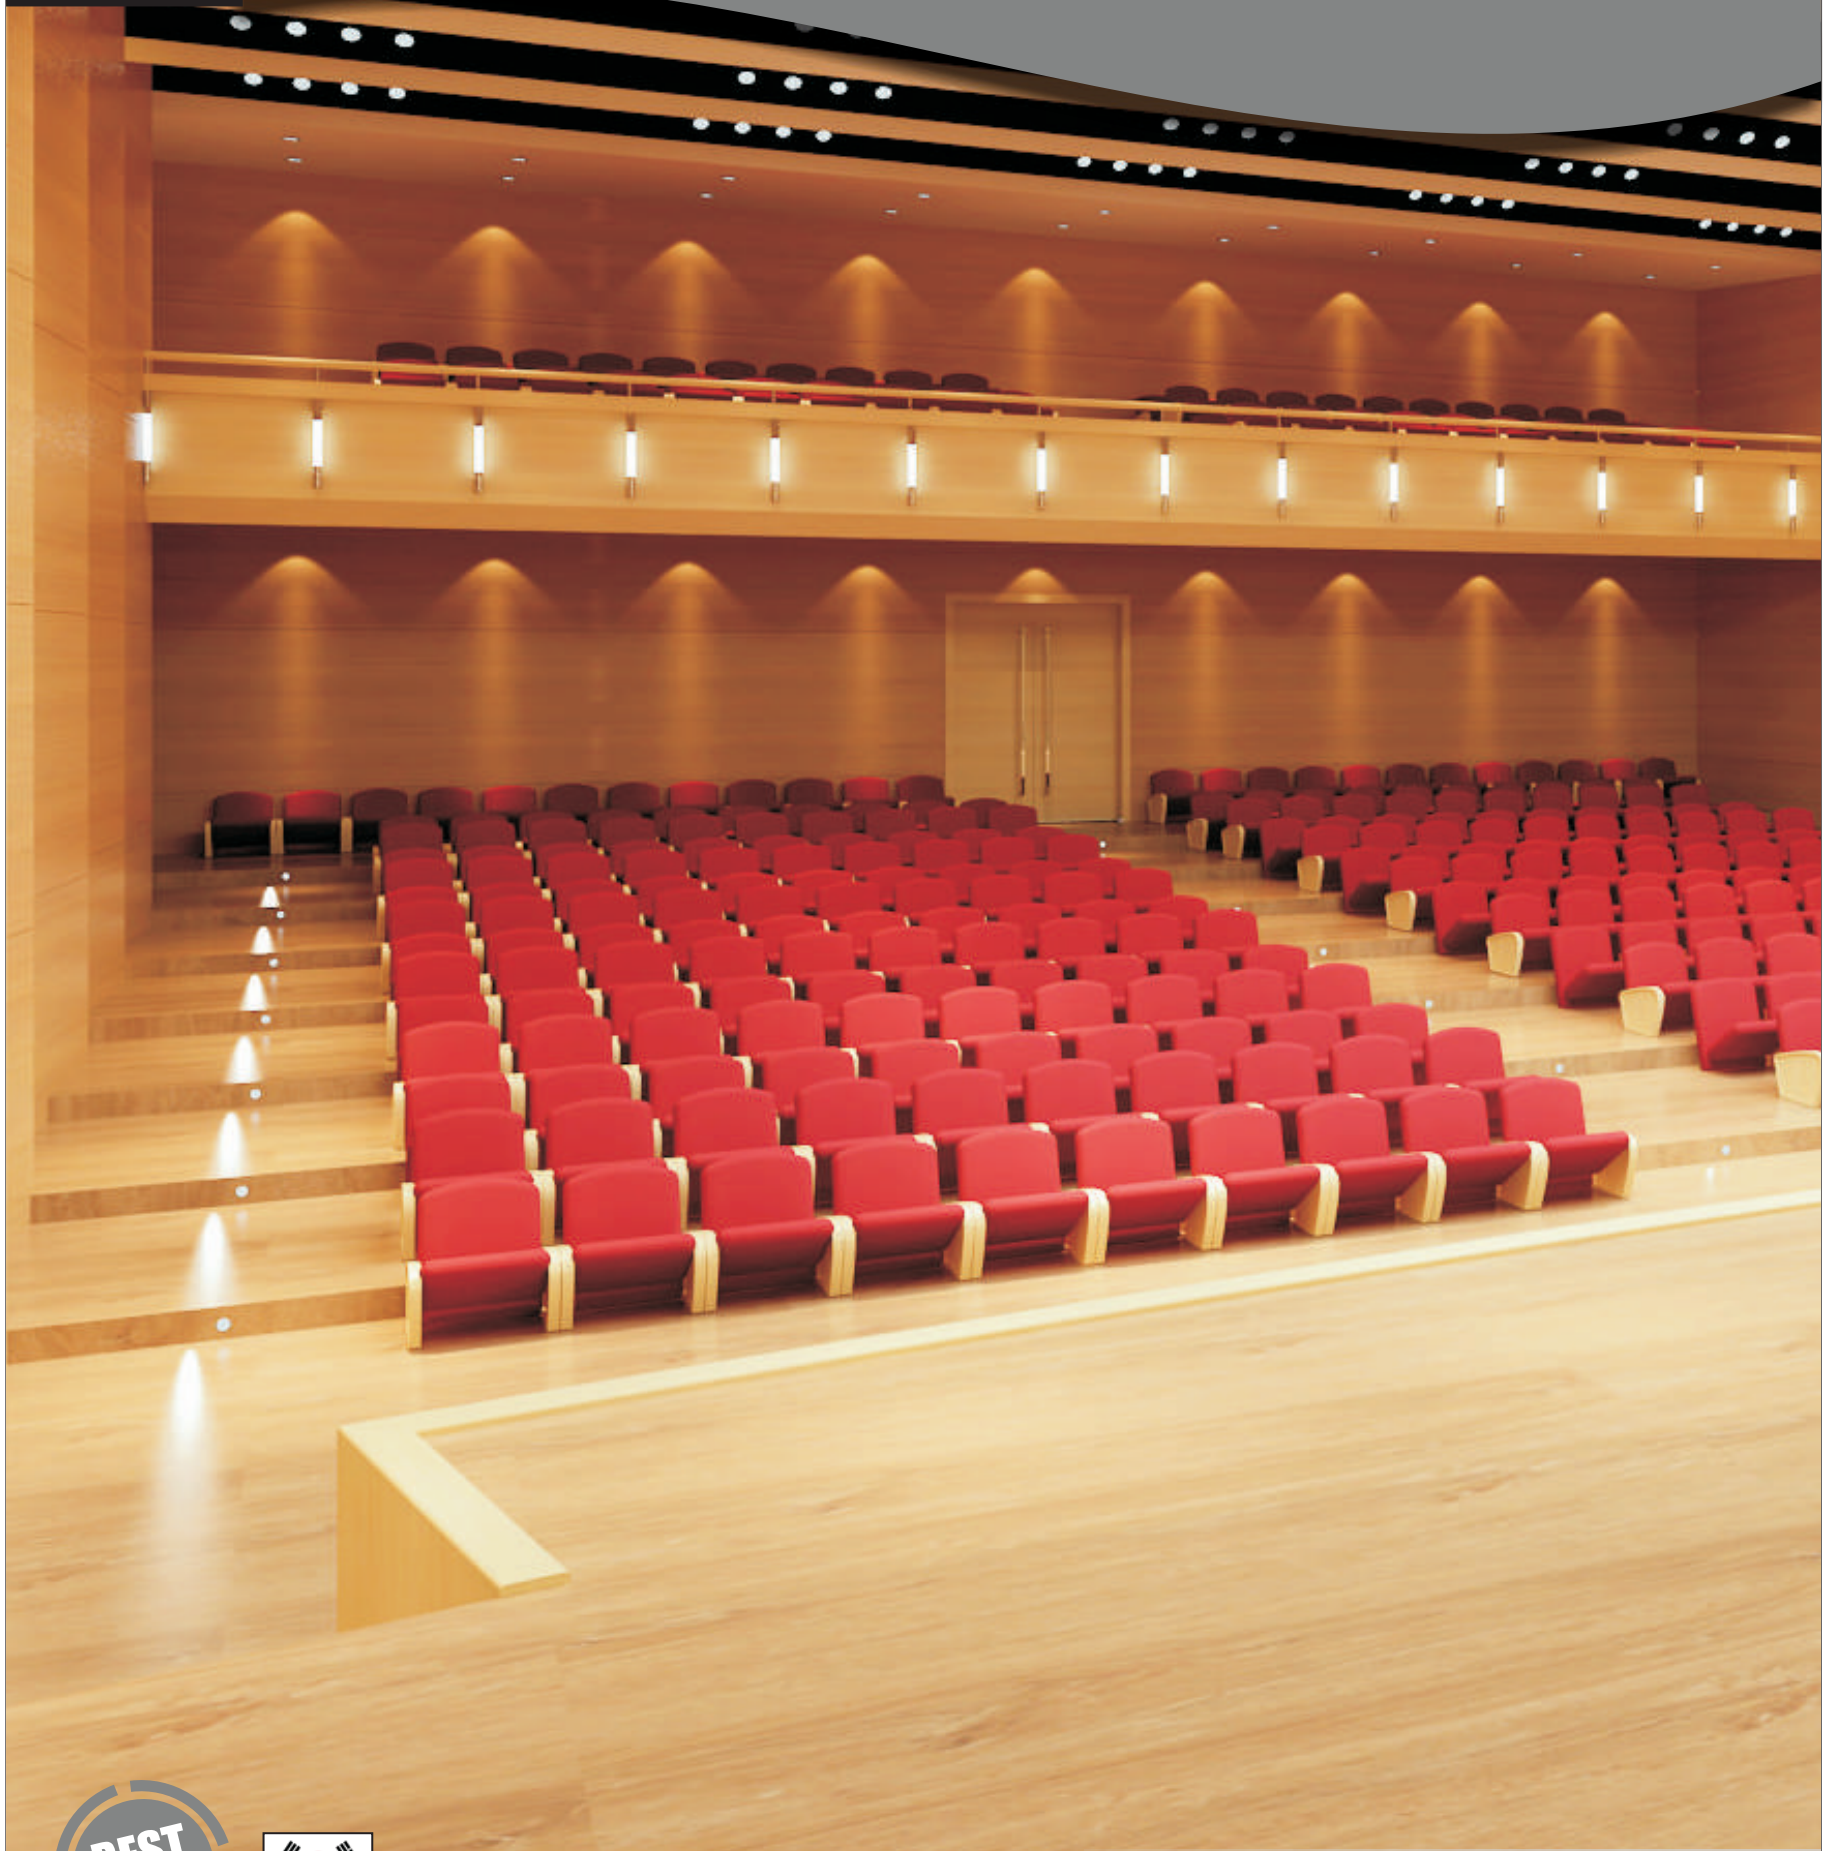

*PRO VIVA KLIK*®

**KOREAN**

**PRO VIVA KLIK®**

*exquisite decors  
for stylish interiors*

TOTAL THICKNESS	: 5.0 MM
WEAR-LAYER	: 0.5MM



▲ VK 101 - CANADIAN OAK



▲ VK 102 - RUSSIAN OAK



▲ VK 113 - CLASSIC OAK STRIPS



▲ VK 109 - BALTIC MAPLE



▲ VK 111 - RUSTIC SCANDINAVIAN OAK



▲ VK 105 - BALTIC MAPLE























▲ VK 103 - ETHNIC WENGE



▲ VK 112 - WENGE SMOOTHENED



## VINYL SPECIFICATIONS

STYLE NAME	PRO-VIVA KLIK	GREEN STORY
REVOLUTIONARY SYSTEM		 <p>As a balanced, consensus coalition representing the entire building industry, we promote the design, construction and operation of buildings that are environmentally responsible, profitable and healthy to live and work.</p> <p>All raw material for the product strictly checked and managed by QC department to meet the domestic and overseas standards.</p>  <p>by </p>
TOTAL THICKNESS	5mm	
WEAR LAYER	0.5mm	
WEAR LAYER PUR TREATMENT	Double PU coated	
ABRASION RESISTANCE	WEAR GROUP T (EN 660-2)	
SLIP RESISTANCE	R10	
TOTAL WEIGHT g/m <sup>2</sup>	8.3kg/m <sup>2</sup>	
PLANK SIZE	169 x 1210mm	
PLANKS PER BOX	10pcs / box	
STOCKING RANGE	Stock in Singapore - Replenishment in 30 to 60 Days	
LEVEL OF USE	Commercial use (23/33/42)	
INFLAMMABILITY	Critical flux > 8.0 kW/m <sup>2</sup>	
SCRATCH RESISTANCE	EN 425 No damage	
CURLING	EN 434 ≤ 0,25%	
ELECTRIC RESISTANCE	< 10 <sup>12</sup> Ohms	
DIMENSIONAL STABILITY	EN 434 ≤ 0,25%	
HEAT INSULATION	KSM 3802 0,3MM / 0.0 1 (80°C + 2°C, 6hr/hr)	
THERMAL RESISTANCE	Dimensional stability after exposure to heat : Tiles (indentation for dry-joint laying) 0.25 - EN 434	
ACOUSTIC INSULATION	EN ISO 140-8 EN ISO 717/2 ΔLw =5dB	
STAIN RESISTANCE	equal to the Chemical resistance	
LIGHT FASTNESS	EN ISO 105-B02 ≥6	
RESISTANCE TO CHEMICALS	No change in color and gloss against Soybean oil, Lubricant Oil, 95% C <sub>2</sub> H <sub>5</sub> OH, 10% NH <sub>3</sub> , Milk, 5%CH <sub>3</sub> COOH 5% HCl, Kerosene	
WARRANTY	5 years for Commercial 10 years for Residential	
MADE IN KOREA		
APPLICATION	     	
CERTIFICATION	        	
FEATURES	      	

Distributed By