

 **Tarkett**

**PRO**  
**FLOORZ**

24616008 ENGLISH OAK CLASSICAL  
(Real wood like texture and structure)

*Inspired by Nature, Woods & Stone collections*

**BEST  
SELLER**

OPTIMAL  
INDOOR AIR  
QUALITY

Recyclable

PHthalate  
FREE

10  
years  
GUARANTEE  
COMMERCIAL USE

TARKETT  
@  
FRANCE

**PRO ID INSPIRATION 55**  
**PRO ID SPESSO 55**

*Best ultra matt finish and unequalled resistance*

24616099



PEARL OAK LATTE

24616017



PATINA ASH GREY

The ultra-matt finish and unparalleled resistance make this product ideal for both commercial and residential spaces.

The 0.55mm wear layer is enhanced with **TEKTANIUM**<sup>®</sup> treatment, providing exceptional resistance to scratches, stains, and soiling. It also offers easy cleaning for maximum hygiene and durability, particularly in areas sensitive to chemicals and staining.

The treatment eliminates the need for wax and polish spray maintenance, making upkeep hassle-free. Additionally, it has a static indentation resistance of  $\leq 0.10$ mm and comes with a 10-year warranty.

24616014



SCANDINAVIAN OAK MEDIUM GREY


24616008



ENGLISH OAK CLASSICAL

**PRO iD INSPIRATION** concrete

SIZE: 33.03 X 60.70 CM | TOTAL THICKNESS: 5.0MM | WEAR LAYER: 0.55MM

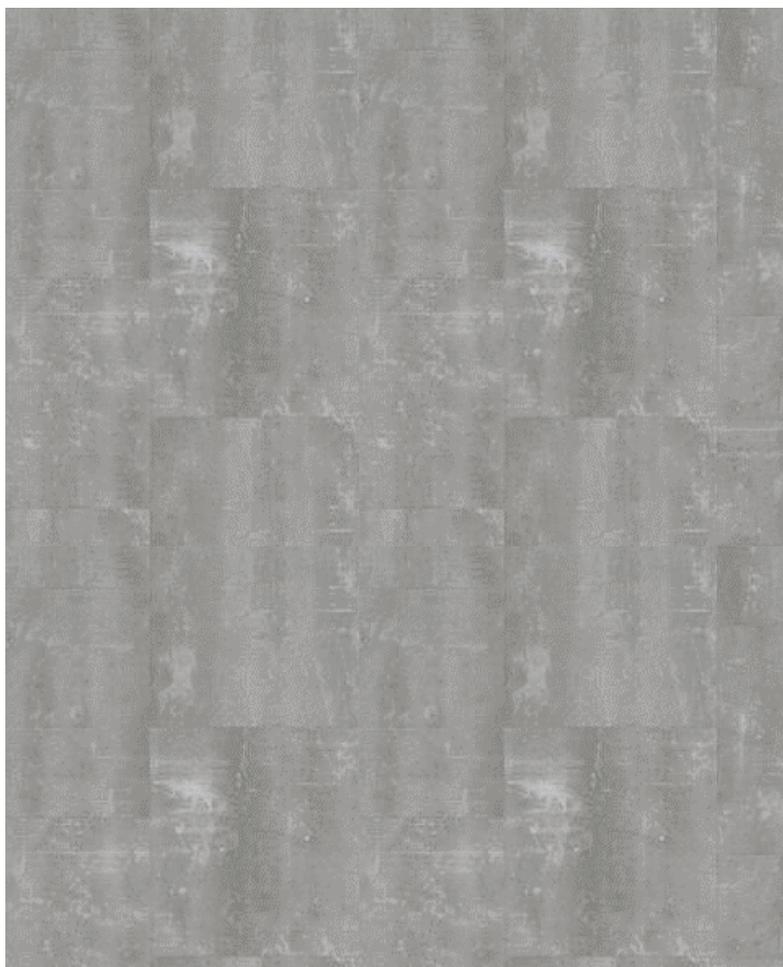

**24625013** COMPOSITE COOL GREY



**24619024** OXIDE BLACK STEEL


**PRO iD SPESSO** concrete & terrazzo

SIZE: 91.44 X 91.44 CM | TOTAL THICKNESS: 5.0MM | WEAR LAYER: 0.55MM | GLUE DOWN

*on indent MOQ: 1 Pallet/Colour  
(46 Boxes: 115.38 m<sup>2</sup>)*



**256072008** VENEZIA GREY

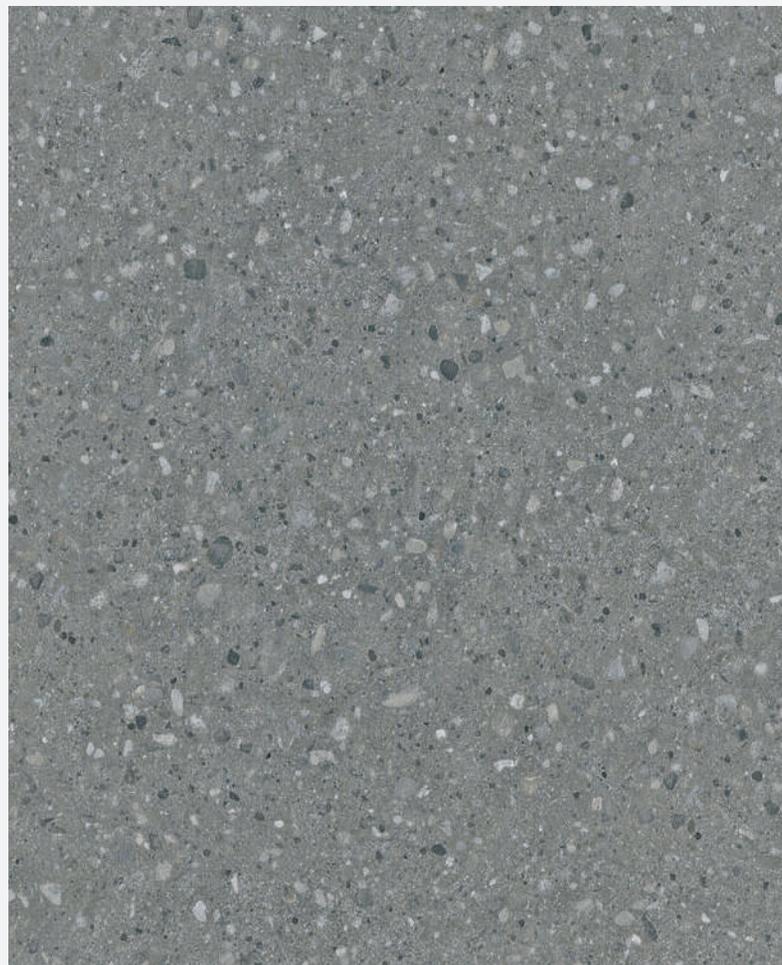

**256072003** SOFT TERRAZZO DARK GREY

# PRO iD SPESSO woods

SIZE: 22.86 X 121.92 CM | TOTAL THICKNESS: 5.0MM | WEAR LAYER: 0.55MM | GLUE DOWN



256073005



CLASSY OAK GREY

256073002



CLASSY OAK BEIGE

Nature guides every aspect of our design journey. We have carefully selected our designs to replicate as good as possible the diversity that we find in nature.

By selecting the best natural tones of wood and expressive stones, we have sought to bring the outdoors in.

The variety of our designs gives you the freedom to subtly match the style that best suits your space. We aim to create positive emotions to help enhance learning, working and caring.

iD Spesso decors were selected to foster a feelgood atmosphere and bring interior designs to life with emphasis on natural looking wood/stone floors.

256073009



SOFT OAK NATURAL

256073010



SOFT OAK BROWN

### VINYL SPECIFICATIONS

| TECHNICAL DATA   | STANDARD                   | PRO ID INSPIRATION 55                                       | PRO ID SPESSO 55                                | PRO Square Set 55<br><small>(on indent)</small>                | GREEN STORY   |  |
|--|----------------------------|---|---|--|---|--|
| Revolutionary System   | EN ISO 10852               | Click system  | Glue Down                                       | Loose lay<br><small>(on indent: MOQ 1 Pallet / colour)</small> |   |  |
| <b>Certification &amp; classification</b>  |                            |   |   |  |   |  |
| Type of floor covering   | EN ISO 10852               | Heterogenous Compact Resilient Floorcovering (EN ISO 10582) |   |  |   |  |
| Classification   | EN ISO 10874               | Domestic: 23<br>Commercial: 33<br>Industrial: 42            | Domestic: 23<br>Commercial: 33                  |  |   |  |
| <b>Technical characteristics</b>   |                            |   |   |  |   |  |
| Total thickness  | EN ISO 24346               | 5mm   |   | 4mm  | <p>Tarkett's commitment to the environment is woven throughout its business. Cradle-to-Cradle principles are, in fact, the basis of the design and production of every solution. Particularly, the lifecycle analysis is used to continuously improve the production process, and so the products until their use stage, disposal and recycling.</p> <p><b>Dare to Inspire</b><br/>In a rapidly changing world, we collectively have an opportunity to rethink and reinvent the way we live and transform our indoor spaces to promote healthier living. Our modular vinyl collection builds on a ten-year journey to continuously improve the user experience. Through our Tarkett Human-Conscious Design® approach, we develop flooring that helps people flourish in their every day without compromising on health and the environment. iD Inspiration exemplifies this approach, delivering enhanced modularity that enables agile transformation of space to meet the evolving demands of work and life. Meanwhile, its nature-inspired colours and themes – heightened by the ultra-realism of digital printing – help to achieve feel-good interiors.</p> |  |
| Wear layer thickness   | EN ISO 24340               | 0.55mm  |   |  |   |  |
| Total weight   | EN ISO 23997               | 8850 g/m <sup>2</sup>                                       | 9000 g/m <sup>2</sup>                           | 7600 g/m <sup>2</sup>  |   |  |
| Wear layer binder content  | EN ISO 10582               | Type I  |   |  |   |  |
| Dimensions   | EN ISO 24342               | Planks: 19.70x121.70 cm<br>Tiles: 33.03x60.70cm             | Planks: 22.86x121.92 cm   Tiles: 91.44x91.44 cm |  |   |  |
| Surface Treatment (PUR)  | -                          | <b>TEKTANIUM™</b><br>SURFACE PROTECT                        | TopClean XP™                                    |  |   |  |
| Beveled edges  | -                          | Yes   | Microbevels                                     |  |   |  |
| <b>Technical performances</b>  |                            |   |   |  |   |  |
| Dimensional stability  | EN ISO 23999               | ≤ 0.15%   |   | ≤ 0.25%  |   |  |
| Curly resultant to heat  | EN ISO 24346               | ≤ 1 mm  | ≤ 2.0mm   |  |   |  |
| Reaction to fire   | EN ISO 24346<br>EN 13501-1 | B <sub>f</sub> -s1 (Highest rating)                         |   |  |   |  |
| Residual indentation   | EN ISO 24343-1             | ≤ 0.10 mm   |   | ≤ 0.20 mm  |   |  |
| Furniture leg  | EN 424                     | No damage   |   |  |   |  |
| Castor chair   | ISO 4918 - EN 425          | No damage   |   |  |   |  |
| Impact sound reduction   | EN ISO 717-2               | ΔLw = 5 dB  | -   |  |   |  |
| Light fastness   | EN ISO 105-B02             | ≥ 6   |   |  |   |  |
| Chemical resistance  | EN ISO 26987               | Very good   | Good  |  |   |  |
| Slip resistance  | EN 13893                   | R9/R10 - μ ≥ 0,30   | R9  |  |   |  |
| Underfloor heating   | -                          | Suitable - max. 27°C  |   |  |   |  |
| <b>Environmental tag</b>   |                            |   |   |  |   |  |
| VOC emission   | ISO 16000-9                | ≤ 10μg/m <sup>3</sup> after 28 days                         | ≤ 100μg/m <sup>3</sup> after 28 days            |  |   |  |
| Recyclable   | -                          | Yes - installation and post-consumer waste                  |   |  |   |  |
| Plasticizer  | -                          | Phthalate-free  |   |  |   |  |
| <p>The above information is subject to modification for the benefits of further improvement.<br/>           According to the European Regulation No 305/2011 for CE Marking, the Declarations of Performance are available on our website <a href="http://www.tarkett.com">www.tarkett.com</a><br/>           Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.<br/>           The designs and photos used in this brochure are for illustration purposes only. They are not contractual images and do not stand for product or installation recommendation.</p> |                            |   |   |  |   |  |
|  |                            |   |   |  |   |  |

Distributed By

